Mini-oscillateur 3/2 - G1/8" | *Mini oscillating valve 3/2 G1/8"*

Raccordements *Ports*	raccords instantanés pour tube Ø4 *Ø4 push-in fittings*
Pression de travail *Working pressure*	3 ... 10 bar *0.3 ... 1 MPa*
Intervalle de temps de régulation *Time regulation range*	0...15 s
Température de travail *Temperature range*	max +60°C
Fluide *Fluid*	air filtré 50µ avec ou sans lubrification *50µ filtered lubricated or non lubricated air*

Matériaux
Corps : Aluminium anodisé
Ressorts : Inox
Joints : NBR
Parties internes : Laiton OT58

Materials
Body : Aluminium 11S
Springs : Stainless steel
Seals : NBR
Internal parts : Brass OT58

Fonctionnement

Il s'agit d'un dispositif qui, alimenté en **1**, fournit en sortie des impulsions pneumatiques de fréquence réglable. Leur fréquence se règle au moyen de la vis de régulation **R**.
Pour un fonctionnement correct, il est nécessaire que la pression d'alimentation soit supérieure ou égale à 3 bar ; en dessous de cette valeur le dispositif peut se bloquer.

Valve operation

*It is a device which, when air is present at port **1**, gives as output implse with variabble frequency. The frequency can be regulated by the screw **R**.*
For the correct operation the minimum main pressure must be 3 bar, otherwise the valve can get blocked.

AX.007.4

Mini-oscillateur 3/2 G1/8"
Mini oscillating valve 3/2 G1/8"
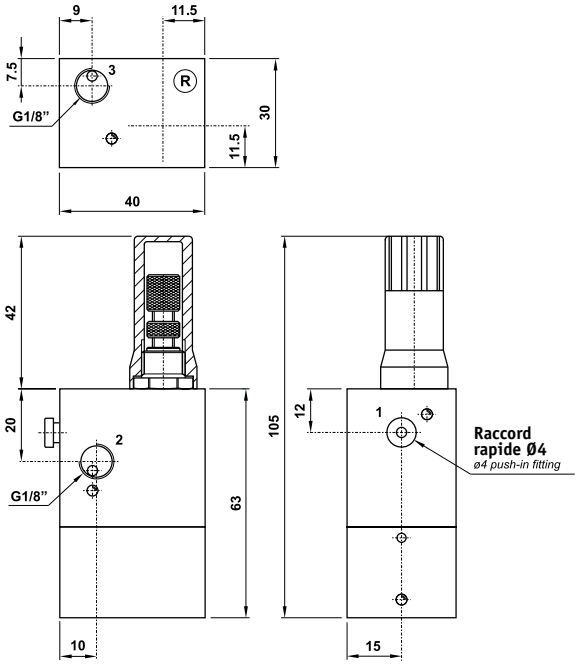
Version Atex 2GD T6 : AX.007.4.ATEX