


CHAPE FEMELLE DE TIGE CNOMO


CF-15



Réf. acier	Ø	A	B	C	D	E	F	G	H	K
CF-15032 A	32	36	22	11	M10x1,5	22	8	20	20	45
CF-15040 A	40-50	51	36	18	M16x1,5	26	12	24	26	64
CF-15063 A	63-80	63	45	22	M20x1,5	34	16	32	30	80
CF-15100 A	100-125	85	63	30	M27x2	42	20	40	45	105
CF-15160 A	160-200	115	80	40	M36x2	50	25	48	75	140

CHAPE FEMELLE DE TIGE ROTULÉE


CF-17



Réf. acier	Ø	A	C	D	E	F	G	H	J	K	L	M	N	P
CF-17032	32	57	43	12,9	15	14	10,5	M10x1,5	17	28	19	10	20	6,5
CF-17040	40-50	85	64	19,3	23	21	15	M16x1,5	22	42	27	16	28	8
CF-17063	63-80	102	77	24,3	27	25	18	M20x1,5	30	50	34	20	33	10
CF-17100	100-125	145	110	34,8	36	37	25	M27x2	41	70	50	30	51	15
CF-17160	160-200	165	125	37,7	41	43	28	M36x2	50	80	58	35	56	17

ÉCROU TIGE


CF-16



Réf. alu.	Ø	A	B	CH
CF-16032	32	M10x1,5	6	17
CF-16040	40-50	M16x1,5	8	24
CF-16063	63-80	M20x1,5	9	30
CF-16100	100-125	M27x2	12	41
CF-16160	160-200	M36x2	14	55

TOURILLON CNOMO RÉGLABLE & FIXE


CF-14



Réf. réglable	Réf. fixe	Ø	A	AE	AL	AH	AG	AF	AN	R	M	Q	Z
CF-14032	CF-14032T	32	33	46	15	12	12	50	37	1	6,25	7	M5
CF-14040	CF-14040T	40	40	59	20	16	16	63	46	1,5	6,25	8	M5
CF-14050	CF-14050T	50	49	69	20	16	16	75	56	1,6	8,25	8	M6
CF-14063	CF-14063T	63	59	84	25	20	20	90	69	1,6	8,25	12	M6
CF-14080	CF-14080T	80	75	102	25	20	20	110	87	1,6	10,25	12	M8
CF-14100	CF-14100T	100	90	125	30	25	25	132	107	2	10,25	15	M8
CF-14125	CF-14125T	125	110	155	32	25	25	160	133	2	12,25	15	M10
CF-14160	CF-14160T	160	140	190	40	32	32	200	170	2,5	16,25	18	M12
CF-14200	CF-14200T	200	175	240	40	32	32	250	211	2,5	16,25	18	M12

SUPPORT DE TOURILLON

NO




Réf. alu.	Réf. acier	Ø	A	M	R	P	C	S	L	U	T	E
N0032	N0032C	32	46	18	30	15	32	12	10,5	11	6,6	7
N0050	N0050C	40-50	55	21	36	18	36	16	12	15	9	9
N0080	N0080C	63-80	65	23	40	20	42	20	13	18	11	11
N0125	N0125C	100-125	75	28,5	50	25	50	25	16	20	14	13
N0200	N0200C	160	92	40	60	30	60	32	22,5	26	18	17
-	N0200C	200	92	40	60	30	60	32	22,5	26	18	17

Réf. alu.	Ø	A	L	D	H	CM	S	R	Z	G
CF-10032A	32	33	45	7	8	26	25	8	18	8
CF-10040A	40	40	52	7	8	33	32	12	24	12
CF-10050A	50	49	65	9	10	33	32	12	26	12
CF-10063A	63	59	75	9	10	47	45	16	30	16
CF-10080A	80	75	95	11	12	47	45	16	32	16
CF-10100A	100	90	115	11	12	57	55	20	37	20
CF-10125A	125	110	140	14	16	57	55	21	41	20
CF-10160A	160	140	180	18	20	72	65	25	55	25
CF-10200A	200	175	220	18	20	72	65	25	55	25

CF-10


CHAPE ARRIÈRE FEMELLE

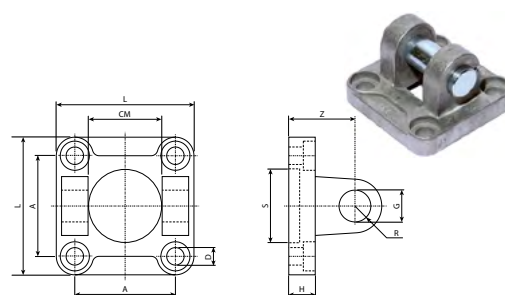

Réf. alu.	Ø	A	B	C	D	E	F	G	H	L	M
CF-11032	32	40	25	28	-	8	8	7	18	16	26
CF-11050	40-50	52	32	38	16	10	12	9	26	24	38
CF-11080	63-80	75	46	54	25	12	16	11	34	36	52
CF-11125	100-125	115	56	90	32	16	20	14	41	40	61
CF-11160	160-200	180	71	150	43	20	25	18	55	50	80

CF-11


CHAPE ARRIÈRE MÂLE

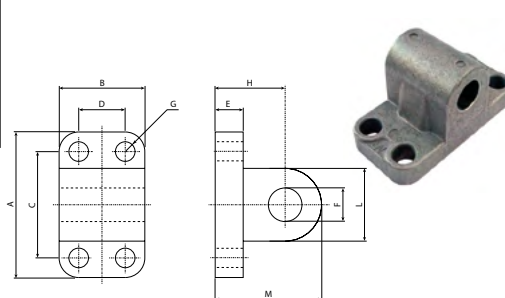

Réf. alu.	Ø	Q	BG	H	I	L	M	N	O	S	R	BQ	G
CF-19032	32	7	20	37	18	8	32	25	41	9	19,5	25	8
CF-19050	40	9	32	54	25	10	45	32	52	14	26	32	12
CF-19050	50	9	32	54	25	10	45	32	52	14	26	32	12
CF-19080	63-80	11	50	75	32	13	63	40	63	14	32	46	16
CF-19125	100-125	14	70	103	40	17	90	50	80	22	42	56	20
CF-19160	160-200	18	110	154	45	20	140	63	111	26	54	70	25

CF-19


CHAPE FARRIÈRE MÂLE D'ÉQUERRE

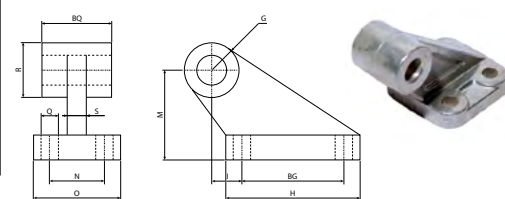

Réf. acier	Ø	A	B	C	D	E	F	G	H	I	L	M	N	R	S	T	U
CF-13032	32	28	32	33	45	35	30	7	15,5	22	27	4,5	3,5	12,5	4	32	11
CF-13040	40	36	36	40	52	36	30	7	16	26	27	4,5	4,5	16	4	36	15
CF-13050	50	45	45	49	65	45	36	9	20,5	30	35	5,5	4,5	16	5	45	16
CF-13063	63	55	50	59	75	45	35	9	20,5	30	35	5,5	4,5	22,5	5	50	18
CF-13080	80	70	63	75	95	55	45	11	25,5	37	43	7	5,5	22,5	6	63	17
CF-13100	100	90	75	90	115	56	44	11	27	37,5	43	7	6,5	27,5	6	73	24
CF-13125	125	100	-	110	140	70	70	14	36	-	52	9	-	27,5	8	91	-
CF-13160	160	130	-	140	180	75	100	18	45	-	62	11	-	32,5	9	115	-
CF-13200	200	170	-	175	220	100	100	18	47	-	62	11	-	32,5	12	135	-

CF-13

ÉQUERRE DE FIXATION

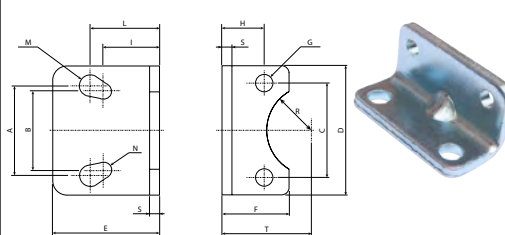

Réf. acier	Ø	A	AP	AO	R	AS	AR	AQ	AT	AV	C	D
CF-12032	32	33	9	25	6,5	8	45	33	68	80	10,5	6
CF-12040	40	40	9	32	6,5	8	52	40	78	90	10,5	6
CF-12050	50	49	11	32	9	10	65	49	94	110	13,5	8
CF-12063	63	59	11	45	9	10	75	59	104	120	13,5	8
CF-12080	80	75	14	45	10,5	12	95	75	130	150	16,5	10
CF-12100	100	90	14	55	10,5	12	115	90	150	170	16,5	10
CF-12125	125	110	18	55	13,5	16	140	110	180	205	19	12,5
CF-12160	160	140	22	65	16,5	20	180	140	228	260	24,5	16,5
CF-12200	200	175	22	65	16,5	20	220	175	268	300	24,5	16,5

CF-12

BRIDE AVANT/ARRIÈRE CNOMO

